

Fever Screening System




Overview


Fever screening system adopts infrared radiation measurement technique to measure body temperature by non-contact means. It provides audio alarms when a person with elevated temperature passes by.

Features

- Intelligent measure algorithm
- Identity recognition
- Quick installing, easy operating
- For orderly flow scenes
- Recording and searching
- Auto audio alarm

Key Specification

 12 μ m	256 \times 192 Resolution	$\pm 0.5^{\circ}\text{C}$ $\pm 0.3^{\circ}\text{C}$ with blackbody High accuracy
0.15~2m Measurement distance	WLP Water level packaging	30~45 $^{\circ}\text{C}$ Temperature measurement range

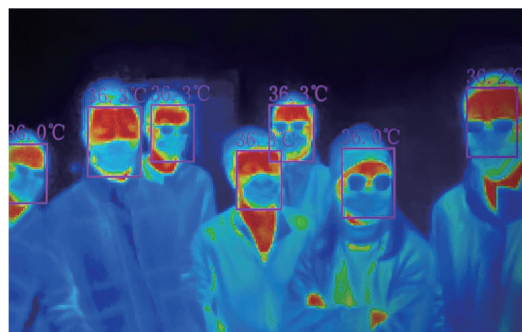

APPLICATIONS

Suitable for public places with large flows of people, such as airports, transportation hubs, shopping malls, schools, enterprises.

Temperature Measurement	
Measurement range	30~45°C
Measuring accuracy	0.5°C (Target temperature:30~45°C)
Measurement distance	0.15m~2m
Infrared Camera	
Resolution	256×192
FPS	25Hz
Focal length	3.2mm
Field of view	56°×42°
F#	1.1
Size	80mm×80mm×14.2mm
IO	Mini USB
Tablet Information	
Battery life	≥5h (No external power supply)
Tablet OS	Windows 10 64bit
Environmental Adaptation	
Operating temperature	2~50°C
Storage temperature	-20°C~+60°C

Tel: +971 4 344 4529

Mob: +971 50 225 1056

Email: sales@climateplus.ae

www.climateplus.ae

Al Quoz Industrial Area 1, 5a St. , Warehouse no. 5